

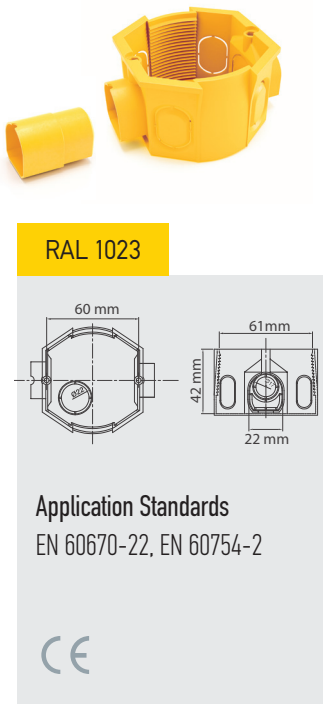
Switch boxes

Multi combination gang



Properties

Box raw material	Heavy metals free (RoHS), specially thermoplastic PO blend
Temperature range	-15°C to +60°C
Electrical characteristics	With electrical insulated characteristics
Resistance to flame propagating	Non flame propagating
Resistance to heat	650°C
Conduit entries	7 up to Ø18 (1 of them at the base up to Ø22)
No of screws dome	2 of 15mm screw length
Ingress protection	IP2X

Ideal for flush mounting installations. Designed with serrated inner surface, to ensure perfect mechanism mounting. The special spouts allow faultless boxes alignment and the 41mm depth creates the right installation space for switches with dimmer. Standardized combination distance 71mm which can be extended to 91 with the use of distance adaptors.



Packaging do not contain distance adaptors.

Type	Part number		
Switch box	3011003	100	-
Distance adaptor	3211003	100	-