



Light type Plastic conduit systems (320Nt)

22412



RAL 7035



Application Standards

EN 61386.22

Assembled with

CONDUR Bend
CONDUR Coupler
CONDUR Adaptor
CONDUR Clip
CONDUR Junction boxes

Patents protected

1009810



SIFLEX® IAS Corrugated conduit


Properties






Properties		Class
Resistance to compression	320Nt/5cm	2
Resistance to impact	1J (at -25°C)	2
Lower temperature range	-25°C	4
Upper temperature range	+60°C	1
Resistance to bending	Pliable	2
Electrical characteristics	With electrical insulated characteristics	2
IP ingress protection	min IP65	6 5
Resistance against corrosion	Not applicable	0
Tensile strength	None declared	0
Resistance to flame propagating	Non flame propagating	1
Suspended load capacity	None declared	0
Fire effects	None declared	0
Environmental impact	None declared	0

Additional properties

Raw material	Heavy metals free (RoHS), specially stabilized thermoplastic U-PVC
Antistatic Technology	Protection against static electricity
Marking	Marked using embossed printing

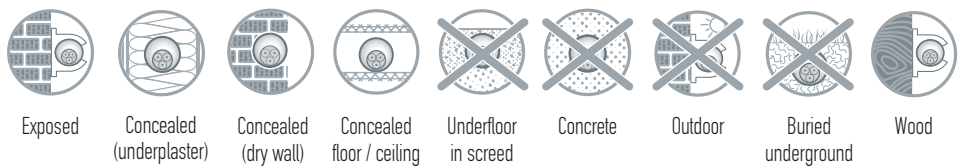Application fields



Type	Part number					
Ø16	2003016	16	11.0	50	2,23	6300
Ø20	2003920	20	14.1	100	5,28	6000
Ø25	2003925	25	18.5	50	3,51	3500
Ø32	2003032	32	24.5	25	2,53	1500
Ø40	2003040	40	31.4	20	2,95	880